

DOP

**ALU RIDGE TAPE**

Sealing and ventilation of the ridge and crests, protection against the negative influence of atmospheric conditions. The tape fulfils its ventilating function perfectly and especially designed system of holes protects from getting in rain and isects.

The tape is made of lacquered aluminium resistant to ultra-violet radiation. Two strips of butyl glue enable easy and comfortable assembly on the roof tiles.

The surface to be glued must be dry, clean and degreased for the installation.


Unroll the tape on the ridge batten, initially fasten the middle part with steel clips or nails, take off the protecting separator from the glue strips and carefully adjust the pleated sides to the shape of roofing.



**DECLARATION OF PERFORMANCE**

Material	Butyl rubber glue and aluminium sheet corrugated and perforated, powder coated on aluminium min 15 µm
Width / Roll lenght	400 mm (+/- 3%) / 5000 mm (+/- 1%)
Thickness	140 µm (+/- 10%)
Air permeability	150 cm / sqm
Elongation	25 (+/- 5 %)
Butil Width	15 mm +/- 1
Outside temperature for installation	+ 5 °C
Temperature resistance	- 30 °C a + 80°C
Colors	Brick red, brown, black, beige
Tensile adhesion strength for 900 of the metal surface: not less than 3 N/cm width of the tape.	

Signature:

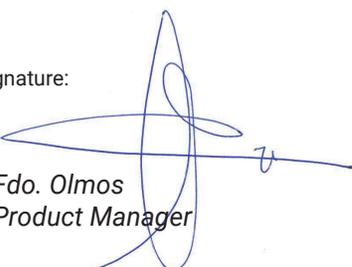

Fdo. Olmos  
Product Manager



**TEJAS BORJA, S.A.U.**  
C.I.F. A-46384764  
Cr. Llíria a Pedralba, Km. 3  
Teléfs. 96 279 80 14 - 96 279 80 15  
46160 LLÍRIA (VALENCIA) ESPAÑA  
Llíria (Valencia), 01 Abril de 2015